



US007914912B2

(12) **United States Patent**
Fearing et al.

(10) **Patent No.:** **US 7,914,912 B2**
(45) **Date of Patent:** **Mar. 29, 2011**

(54) **ACTIVELY SWITCHABLE
NANO-STRUCTURED ADHESIVE**

(75) Inventors: **Ronald S. Fearing**, Orinda, CA (US);
Abraham Bachrach, Palo Alto, CA
(US); **Richard Groff**, Berkeley, CA
(US); **Carmel Majidi**, Berkeley, CA
(US)

(73) Assignee: **The Regents of the University of
California**, Oakland, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1208 days.

(21) Appl. No.: **11/271,103**

(22) Filed: **Nov. 10, 2005**

(65) **Prior Publication Data**

US 2008/0014465 A1 Jan. 17, 2008

Related U.S. Application Data

(60) Provisional application No. 60/626,893, filed on Nov.
10, 2004.

(51) **Int. Cl.**
B32B 15/00 (2006.01)

(52) **U.S. Cl.** **428/692.1; 428/141**

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,609,468	A *	9/1971	Kihara et al.	361/526
4,545,831	A	10/1985	Ornstein	
4,704,745	A	11/1987	Reaver	
5,264,722	A	11/1993	Tonucci et al.	
5,392,498	A	2/1995	Goulait et al.	
5,843,657	A	12/1998	Liotta et al.	

5,843,767	A	12/1998	Beattie	
5,951,931	A	9/1999	Murasaki et al.	
5,959,200	A	9/1999	Chui et al.	
6,055,680	A	5/2000	Tolbert	
6,329,738	B1 *	12/2001	Hung et al.	310/309
6,393,327	B1	5/2002	Scribner	
6,713,151	B1	3/2004	Dean et al.	
6,737,160	B1	5/2004	Full et al.	
6,863,942	B2 *	3/2005	Ren et al.	428/36.9
6,872,439	B2	3/2005	Fearing et al.	
6,875,274	B2 *	4/2005	Wong et al.	117/105

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2002-307398 A 10/2002

(Continued)

OTHER PUBLICATIONS

Shahinpoor, M.; Micro-electro-mechanics of Ionic Polymer Gets as
Electrically Controllable Artificial Muscles, J. Intelligent Material
Systems and Structures, vol. 6, pp. 307-314 (1995).

(Continued)

Primary Examiner — Mark Ruthkosky


Assistant Examiner — Sathavaram I Reddy

(74) *Attorney, Agent, or Firm* — Morrison & Foerster LLP

(57) **ABSTRACT**

Described herein is a microstructure having a substrate and a
plurality of nano-fibers attached to the substrate. Each nano-
fiber moves between the first and second states without an
external mechanical load being applied to the nano-fibers.
Each nano-fiber is configured to move between a first state
and a second state in response to applied electricity, magne-
tism, chemical solution, heat, or light. Each nano-fiber is
straight in the first state and curved in the second state, and
when the nano-fibers are in the second state and in contact
with a contact surface, the nano-fibers adhere to the contact
surface.

17 Claims, 3 Drawing Sheets

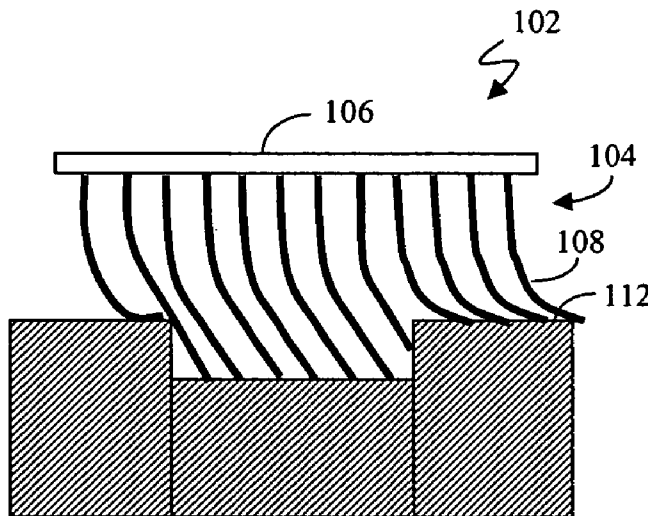

U.S. PATENT DOCUMENTS

7,264,876	B2 *	9/2007	Smalley et al.	428/407
7,294,397	B2 *	11/2007	Jagota et al.	428/357
2002/0100581	A1	8/2002	Knowles et al.	
2003/0124312	A1	7/2003	Autumn	
2003/0142456	A1 *	7/2003	Carnahan	361/233
2003/0143398	A1 *	7/2003	Ohki et al.	428/398
2003/0143453	A1	7/2003	Ren et al.	
2003/0185741	A1 *	10/2003	Matyjaszewski et al.	423/445 R
2003/0208888	A1 *	11/2003	Fearing et al.	24/442
2004/0005454	A1	1/2004	Full et al.	
2004/0009353	A1	1/2004	Knowles et al.	
2004/0058153	A1 *	3/2004	Ren et al.	428/408
2004/0071870	A1 *	4/2004	Knowles et al.	427/200
2004/0076822	A1	4/2004	Jagota et al.	
2004/0206448	A1 *	10/2004	Dubrow	156/276
2005/0072509	A1	4/2005	Full et al.	
2005/0092414	A1 *	5/2005	Jones et al.	152/210
2005/0181170	A1	8/2005	Fearing et al.	
2005/0230270	A1 *	10/2005	Ren et al.	205/777.5

FOREIGN PATENT DOCUMENTS

WO	WO-99/32005	7/1999
WO	WO-01/49776	7/2001
WO	WO-03/095190	11/2003

OTHER PUBLICATIONS

Uchino, K; Pooanaas, P; Tonooka, K: Photostrictive Actuators—New Perspective; *Ferroelectrics* 258; pp. 439-450 (Jan. 4, 2001).
 Autumn, Kellar et al., (Jun. 8, 2000) "Adhesive force of a single gecko foot-hair," *Nature*, 405: 681-658.
 Cartmill, Matt (1985) "Chapter 5: Climbing," in *Functional Vertebrate Morphology*, M. Hildebrand et al. eds., Belknap Press of Harvard University Press, Cambridge, MA, pp. 73-88.
 Edwards, John S. et al., (1970) "The adhesive pads of Heteroptera: a re-examination," *Proc. R. ent. Soc. Lond.* 45(1-3): 1-5.
 Fearing et al., pending U.S. Appl. No. 11/143,372, filed Jun. 1, 2005.
 Hora, Sunder Lal (1923) "The Adhesive Apparatus on the Toes of certain Geckos and Tree-frogs," *Journal of the Asiatic Society of Bengal* 9: 137-145.
 Irschick, Duncan J. et al., (1996) "A comparative analysis of clinging ability among pad-bearing lizards," *Biological Journal of the Linnean Society*, 59: 21-35.
 Janra (Oct. 18, 2002) "Gecko feet in-hair-ently sticky (Science)," <<http://www.kuro5shin.org/?op=displaystory;sid=2002/10/18/03840/816>>, printed Nov. 17, 2005, 12 pages.
 Liang, Yiching A. et al., (Jun. 2000) "Adhesion Force Measurements on single Gecko Setae," *Technical Digest of the 2000 Solid-State Sensor and Actuator Workshop*, Jun. 4-8, 2000, Hilton Head Island, SC, pp. 33-38.

Maderson, P. F. A. (Aug. 15, 1964) "Keratinized Epidermal Derivatives as an Aid to Climbing in Gekkonid Lizards," *Nature*, 203: 780-781.

Mahendra, Beni Charan, (1941) "Contributions to the Bionomics, Anatomy, Reproduction and Development of the Indian House-Gecko, *Hemidactylus Flaviviridis* Ruppel," *Proceedings of the Indian Academy of Science*, 13(5) Sec. B: 288-306.

Paul, Robert C. et al., (Oct. 21, 1999) "How do flies and other insects walk up walls, ceilings and even apparently smooth glass windows?" <http://www.sciam.com/askexpert_question.cfm?articleID=00053735-601D-1C72-9EB7809EC588F2D7>, 2 pages.

Peterson, J. A. et al., (Jul. 21, 1981) "A case study in retrograde evolution: the *onca* lineage in anoline lizards. II. Subdigital fine structure," *Bulletin of the Museum of Comparative Zoology*, 149(4): 215-268.

Ruibal, Rodolfo et al., (Nov. 1965) "The Structure of the digital Setae of Lizards," *Journal of Morphology*, 117: 271-294.

Russell, Anthony P. (1975) "Contribution to the functional analysis of the foot of the Tokay, *Gekko gecko* (Reptilla: Gekkonidae)," *Zool. Lond.*, 176: 437-476.

Shahinpoor, Mohsen (May 1995) "Micro-Electro-Mechanics of Ionic Polymeric Gels as Electrically Controllable Artificial Muscles," *Journal of Intelligent Material Systems and Structures*, 6: 307-314.

Sitti, Metin et al., (Sep. 2002) "Synthetic Gecko Foot-Hair Micro/Nano-Structures for Future Wall-Climbing Robots," *Proceedings of the IEEE International Conference on Robotics and Automation, ICRA 2003*, Sep. 14-19, 2003, Taipei, Taiwan, 7 pages.

Spice, (Jul. 7, 2003) "Scientists unravel mystery of gecko's sticky feet," *post-gazette.com Health & Science*, <<http://web.archive.org/web/20030709183536/http://www.post-gazette.com/healthscience/...>>, printed Nov. 17, 2005, 6 pages.

Stork, N. E., (Mar. 1980) "A scanning electron microscope study of tarsal adhesive setae in the Coleoptera" *Zoological Journal of the Linnean Society*, 68: 173-306.

Stork, N. E. (Oct. 1980) "Experimental analysis of adhesion of *chrysolina polita* (Chrysomelidae: Coleoptera) on a variety of surfaces," *J. exp. Biol.*, 88: 91-107.

Thurn-Albrecht, T. et al., (Dec. 15, 2000) "Ultrahigh-Density Nanowire Arrays Grown in Self-Assembled Diblock Copolymer Templates," *Science*, 290: 2126-2129.

Uchino, K. et al., (Jan. 4, 2001) "Photostrictive Actuators—New Perspective," *Ferroelectrics*, 258: 439-450.

Williams, E. E. (Mar. 19, 1982) "Convergent and Alternative Designs in the Digital Adhesive Pads of Scincid Lizards," *Science*, 215: 1509-1511.

* cited by examiner

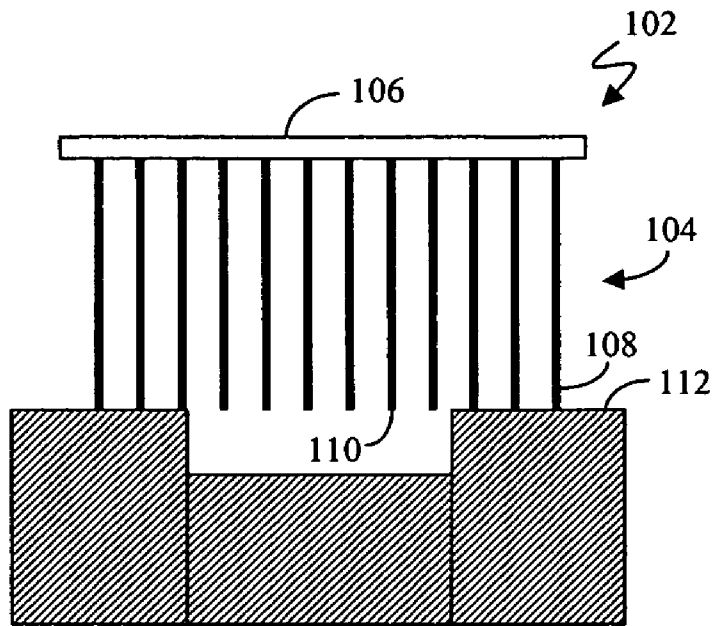


Fig. 1-A

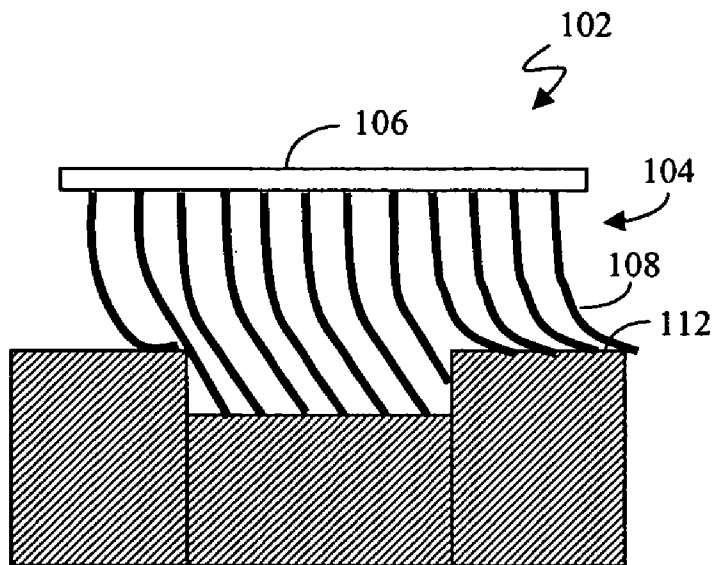


Fig. 1-B

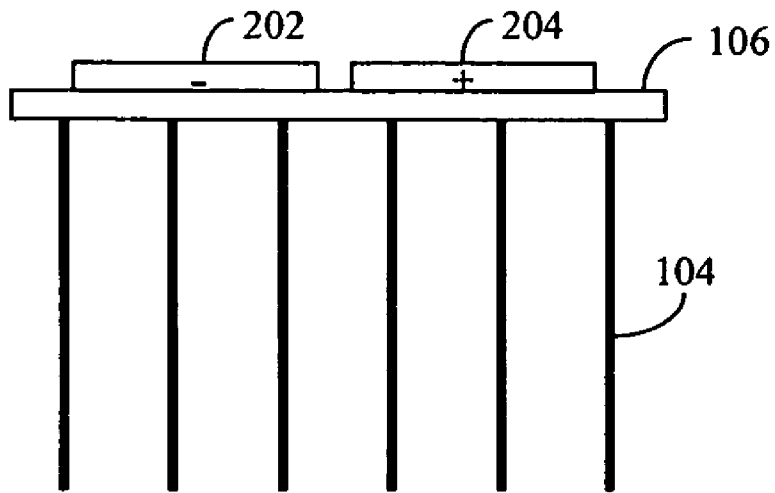


Fig. 2-A

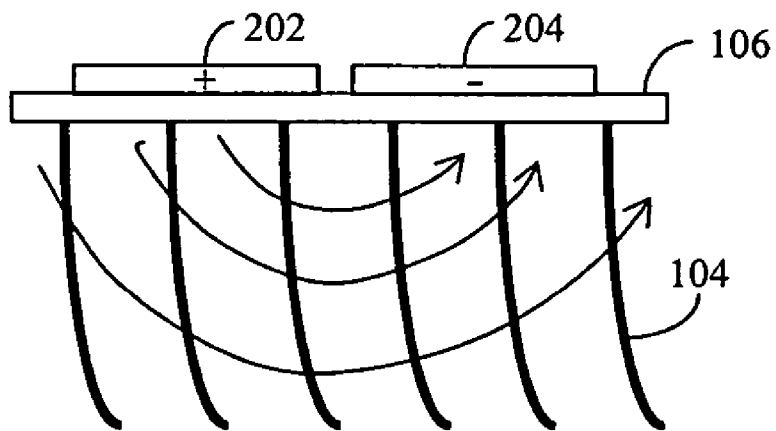


Fig. 2-B

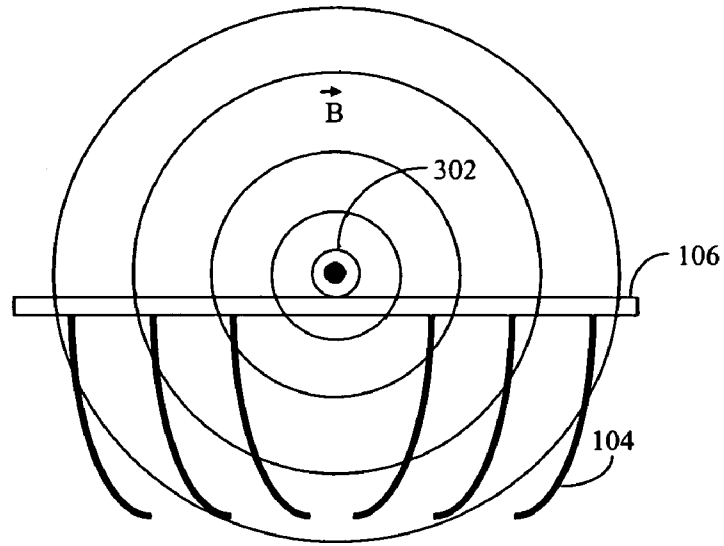


Fig. 3

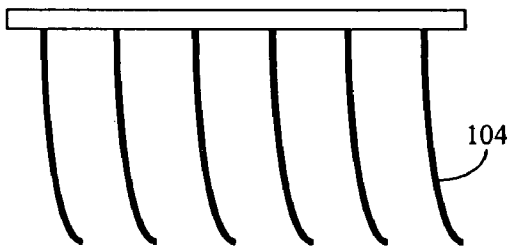


Fig. 4-A

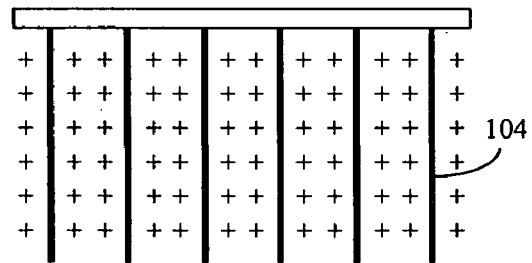


Fig. 4-B

ACTIVELY SWITCHABLE NANO-STRUCTURED ADHESIVE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit under 35 USC 119(e) of U.S. Provisional Application No. 60/626,893, filed Nov. 10, 2004, which is incorporated herein by reference.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

This invention was made with Government support under Grant (Contract) No. EEC-0304730 awarded by the National Science Foundation Nanoscale Interdisciplinary Research Teams. The Government has certain rights in this invention.

BACKGROUND

1. Field

This application generally relates to the fabrication and utilization of micron-scale structures. More particularly, this application relates to an actively switchable adhesive nano-structure.

2. Related Art

There is an ongoing need for improved adhesives. Improved adhesives have applications ranging from everyday aspects of life (e.g., tape, fasteners, and toys) to high technology (e.g., removal of microscopic particles from semiconductor wafers, transporting fiber optic devices, and assembly of sub-mm mechanisms, particularly those including micro-fabricated components, or components that cannot tolerate grippers, adhesives, or vacuum manipulators).

Adhesive mechanisms in nature have been studied, but have not been fully understood or exploited. For example, Geckos are exceptional in their ability to rapidly climb up smooth vertical surfaces. The mechanism of adhesion used by Geckos, Anolis lizards, some skinks, and some insects, has been debated for nearly a century.

It would be highly desirable to control the adhesive force mechanism utilized by Geckos and other animals and insects, resulting in the utilization of new adhesive microstructures and the fabrication of such structures.

SUMMARY

Described herein are fabricated microstructures. A micro-structure comprises a substrate and a plurality of nano-fibers attached to the substrate. Each nano-fiber moves between the first and second states without an external mechanical load being applied to the nano-fibers. Each nano-fiber is configured to move between a first state and a second state in response to applied electricity, magnetism, chemical solution, heat, or light. Each nano-fiber is straight in the first state and curved in the second state, and when the nano-fibers are in the second state and in contact with a contact surface, the nano-fibers adhere to the contact surface.

Also described herein is a method of forming a fabricated microstructure. The method comprises forming a plurality of nano-fibers attached to a substrate. The nano-fibers configured to move between a first state and a second state in response to applied electricity, magnetism, chemical solution, heat, or light. The nano-fibers are straight in the first state and curved in the second state, and when the nano-fibers are in the second state and in contact with a contact surface, the nano-fibers adhere to the contact surface.

Also described herein is a method of adhering a fabricated microstructure to a contact surface. The method comprises moving a plurality of nano-fibers attached to a substrate from a first state in which the nano-fibers are straight to a second state in which the nano-fibers are curved by applying electricity, magnetism, chemical solution, heat, or light to the nano-fibers; and placing the substrate on the contact surface to adhere the nano-fibers in the second state to the contact surface. In an alternate embodiment, the nano-fibers in the first straight state can first be placed in contact with the contact surface, then curved by applying electricity, magnetism, chemical solution, heat, or light to the nano-fibers to adhere the nano-fibers to the contact surface.

DESCRIPTION OF DRAWING FIGURES

FIG. 1A illustrates an exemplary fabricated microstructure array of nano-fibers attached to a substrate.

FIG. 1B illustrates the condition where a stalk of a nano-fiber is curved to form a smaller contact angle with a contact surface.

FIG. 2A illustrates an exemplary embodiment where nano-fibers are differentially coated with an electroactive polymer (EAP).

FIG. 2B illustrates the condition where a voltage is applied to the electrodes and an electric field is generated to bend the nano-fibers without applying an external mechanical load on the nano-fibers.

FIG. 3 illustrates an exemplary embodiment where the nano-fibers include ferromagnetic or paramagnetic material, and a wire is disposed on a substrate.

FIG. 4A illustrates an exemplary embodiment where the nano-fibers are configured to be normally curved.

FIG. 4B illustrates the condition where a charge is applied and the nano-fibers can be configured to straighten.

DETAILED DESCRIPTION

With reference to FIG. 1-A, in one exemplary embodiment, a fabricated microstructure array **102** of nano-fibers **104** attached to a substrate **106** is depicted. Substrate **106** can be rigid or flexible. Each nano-fiber **104** includes a stalk **108** and a terminus **110**. In general, stalk **108** may be between about 0.5 microns and 100 microns in length. The diameter of stalk **108** is between about 50 nanometers (nm) and 2.0 microns. In the present embodiment, terminus **110** is a flat end with essentially the same shape as stalk **108**. It should be recognized, however, that terminus **110** can have any shape. For example, terminus **110** may be in the form of a paddle or flattened surface, a flattened segment of a sphere, an end of a cylinder, a sphere, or a blunt end.

In the present exemplary embodiment, when stalk **108** of a nano-fiber **104** is straight and oriented substantially perpendicular to a contact surface **112**, nano-fiber **104** is unlikely to engage, and therefore will not likely adhere to contact surface **112**. However, with reference to FIG. 1-B, when stalk **108** of nano-fiber **104** is curved to form a smaller contact angle with contact surface **112**, nano-fiber **104** will more likely adhere to contact surface **112**. It should be recognized that a portion of the length or the entire length of nano-fiber **104** can be curved.

In particular, each nano-fiber **104** of array **102**, when engaged with contact surface **112**, mimics the adhesive properties of nano-fibrous spatulae situated on setae of a Tokay Gecko. Each nano-fiber **104** engages with and adheres to contact surface **112** using van der Waals forces and other intermolecular forces. In certain embodiments, the average force provided at contact surface **112** by a single nano-fiber

104 is between about 0.06 to 0.20 μN , or between about 60 and 200 nano-Newtons. In other embodiments, the average force provided at contact surface **112** by a single nano-fiber **104** is between about 1.00 and 200 nano-Newtons. In other embodiments, nano-fiber **104** can provide a substantially normal adhesive force of between about 20 and 8,000 nano-Newtons. In still other embodiments, nano-fiber **104** can provide a substantially parallel adhesive force of between about 5 and 2,000 nano-Newtons.

As depicted in FIG. 1-B, by proper choice of nano-fiber length, angle, density and diameter, and substrate material, nano-fibers **104** can adhere to rough surfaces. To avoid tangling, nano-fibers **104** are optimally sufficiently stiff and separated while still sufficiently dense to provide enough adhesion force. A further discussion of such design characteristics of nano-fibers **104** that are configured to mimic gecko seta is found in U.S. Pat. No. 6,737,160 and U.S. patent application Ser. No. 10/197,763, each of which is hereby incorporated by reference in its entirety.

Nano-fibers **104** can be made from various materials, such as polymers, for example, polyester, polyurethane and polyimide. Nano-fibers **104** can be fabricated using any number of techniques, including an oxide/nitride process. For a further discussion of techniques for fabricating nano-fibers **104**, see U.S. Pat. No. 6,737,160 and U.S. patent application Ser. No. 10/197,763, each of which is hereby incorporated by reference in its entirety.

In one exemplary embodiment, nano-fibers **104** are configured to move between a first state and a second state in response to applied electricity, magnetism, chemical solution, heat, or light without a load applied to nano-fibers **104**. As depicted in FIG. 1-A, in the first state, nano-fibers **104** are straight. As depicted in FIG. 1-B, in the second state, nano-fibers **104** are curved. Thus, in this manner, nano-fibers **104** are actively switchable between the first state and second state without an external mechanical load applied to nano-fibers **104**.

As described above, when nano-fibers **104** are straight (i.e., in the first state), they are unlikely to engage with contact surface **112**. When nano-fibers **104** are curved (i.e., in the second state), they are more likely to adhere to contact surface **112**. Thus, by switching between the first state and the second state, nano-fibers **104** switch from being unlikely to engage with contact surface **112** to being more likely to adhere to contact surface **112**.

The ability to switch between the first and the second state can be used in any number of applications where control of adhesion between two objects is desired. For example, nano-fibers **104** can be disposed on the foot of a robot. When desired, such as to adhere the foot to a surface, nano-fibers **104** on the foot can be made to be adhesive (i.e., moved to the second state). To lift the foot from the surface, nano-fibers **104** on the foot can be made to release (i.e., moved to the first state).

In one exemplary embodiment, with reference to FIG. 2-A, nano-fibers **104** are differentially coated with an electroactive polymer (EAP). In particular, a nano-fiber **104** is differentially coated by coating a portion of the nano-fiber **104** while not coating another portion (i.e., the nano-fiber is non-uniformly coated). As depicted in FIG. 2-A, a set of electrodes **202**, **204** can be disposed on substrate **106** adjacent to the base of nano-fibers **104**. Electrodes **202**, **204** are positive and negative pairs. In the exemplary embodiment depicted in FIG. 2-A, electrode **202** is positive, and electrode **204** is negative. Any number of sets of electrodes **202**, **204** can be disposed at intervals close enough to achieve the desired field strength.

With reference to FIG. 2-B, when a voltage is applied to electrodes **202**, **204**, an electric field is generated. As depicted in FIG. 2-B, the outward arcs of the electric field pass through nano-fibers **104** to activate the EAP material. In response to

the generated electric field, due to the strain differential between the EAP material and the substructure of nano-fibers **104**, the EAP material on nano-fibers **104** contracts to bend nano-fibers **104** without applying an external mechanical load on nano-fibers **104**. When the voltage is no longer applied, nano-fibers **104** return to the first state (i.e., nano-fibers **104** are straight).

In another exemplary embodiment, rather than EAP material, nano-fibers **104** are differentially coated with a magnetostrictive material such as a terbium/dysprosium alloy, for example Terfenol-D. Also, rather than applying an electric field, a magnetic field is applied to activate the magnetostrictive material to bend nano-fibers **104**. Similarly, nano-fibers **104** can be differentially coated with a chemically-responsive material to bend nano-fibers **104**. For example, a pH change on a gel can induce a strain. (See, Shahinpoor, M., *Microelectro-mechanics of Ionic Polymer Gels as Electrically Controllable Artificial Muscles*, J. Intelligent Material Systems and Structures, Vol. 6, pp. 307-314 (1995), which is incorporated herein by reference in its entirety.) Also, nano-fibers **104** can be differentially coated with a heat-sensitive or a light-sensitive material to bend nano-fibers **104** in response to applied heat or light, respectively. For example, nano-fibers can be made from two metals with different coefficients of thermal expansion, such as in a bimetallic strip used in thermostats. A coating of a photostrictive material, such as lead lanthanum zirconate titanate (PLZT) would allow nano-fibers **104** to bend when exposed to light. (See, Uchino, K; Poosanaas, P; Tonooka, K; *Photostrictive Actuators—New Perspective; Ferroelectrics* 258; pp. 439-450 (Jan. 4, 2001), which is incorporated herein by reference in its entirety.)

With reference to FIG. 3, in another exemplary embodiment, nano-fibers **104** include ferromagnetic material, such as nickel or iron alloys. For example, nano-fibers **104** can be differentially coated with ferromagnetic material, or formed from ferromagnetic material. As depicted in FIG. 3, in the present exemplary embodiment, a wire **302** is disposed on substrate **106**. When a current is applied to wire **302**, a magnetic field is generated. As depicted in FIG. 3, the arcs of the generated magnetic field pass through nano-fibers **104**. In response to the generated magnetic field, paramagnetic and ferromagnetic material is activated to bend nano-fibers **104** without applying a load on nano-fibers **104**.

In the exemplary embodiments described above, nano-fibers **104** were described as moving from the first state to the second state in response to applied electricity, magnetism, chemical solution, heat, or light. Additionally, nano-fibers **104** were described as remaining in or returning to the first state when electricity, magnetism, chemical solution, heat, or light is not applied. It should be recognized, however, that nano-fibers **104** can be configured to move from the second state to the first state in response to applied electricity, magnetism, chemical solution, heat or light without applying a load on nano-fibers **104**. Additionally, nano-fibers **104** can be configured to remain in or return to the second state when electricity, magnetism, chemical solution, heat, or light is not applied.

For example, with reference to FIG. 4-A, nano-fibers **104** are configured to be normally in state two (i.e., curved). As depicted in FIG. 4-B, when a charge is applied, nano-fibers **104** can be configured to move to state one (i.e., straight).

The foregoing description, for purposes of explanation, used specific nomenclature to provide a thorough understanding of the invention. However, it will be apparent to one skilled in the art that the specific details are not required in order to practice the invention. Thus, the foregoing descriptions of specific embodiments of the present invention are presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed; obviously many modifications and variations are possible in view of the above teachings.

5

The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

We claim:

1. A fabricated microstructure, comprising:
a substrate;
a set of electrodes or a wire disposed on the substrate; and a nano-fiber attached to the substrate,
wherein the nano-fiber is differentially coated with an electroactive polymer, magnetostrictive material, paramagnetic, or ferromagnetic material to leave a portion of the nano-fiber coated with the electroactive polymer, magnetostrictive material, paramagnetic, or ferromagnetic material and another portion of the nano-fiber uncoated, wherein the nano-fiber is electrically isolated from said set of electrodes or wire,
the nano-fiber configured to move between a first state and a second state in response to an electric field applied by the set of electrodes or magnetic field applied by the wire, wherein the nano-fiber is straight in the first state and curved in the second state, wherein, when the nano-fiber is in the first state and in contact with a contact surface, the nano-fiber does not adhere to the contact surface, and wherein, when the nano-fiber is in the second state and in contact with the contact surface, the nano-fiber adheres to the contact surface.
2. The fabricated microstructure of claim 1,
wherein in response to an applied voltage, the electrodes generate the electric field that activates the electroactive polymer on the nano-fiber to bend the nano-fiber.
3. The fabricated microstructure of claim 1, wherein in response to the applied magnetic field generated by the wire, the magnetostrictive material on the nano-fiber bends the nano-fiber.
4. The fabricated microstructure of claim 1,
wherein in response to an applied current, the wire generates the magnetic field that activates the paramagnetic or ferromagnetic material to bend the nano-fiber.
5. The fabricated microstructure of claim 1, wherein the nano-fiber moves between the first and second states without an external mechanical load being applied to the nano-fiber.
6. The fabricated microstructure of claim 1, wherein the entire length of the nano-fiber is curved.
7. A fabricated microstructure, comprising:
a substrate;
a set of electrodes disposed on the substrate; and a plurality of nano-fibers attached to the substrate,
wherein the nano-fibers are differentially coated with an electroactive polymer material to leave a portion of each nano-fiber coated with the electroactive polymer and another portion of the nano-fiber uncoated,
wherein the nano-fibers are electrically isolated from said set of electrodes,
the nano-fibers configured to move between a first state and a second state in response to an electric field applied by the set of electrodes, wherein each nano-fiber is straight in the first state and curved in the second state, wherein, when the nano-fibers are in the first state and in contact with a contact surface, the nano-fibers do not adhere to the contact surface, and wherein, when the nano-fibers

6

are in the second state and in contact with the contact surface, the nano-fibers adhere to the contact surface.

8. The fabricated microstructure of claim 7, wherein in response to an applied voltage, the electrodes generate the electric field that activates the electroactive polymer on the nano-fibers to bend the nano-fibers.

9. The fabricated microstructure of claim 7, wherein the nano-fibers move between the first and second states without an external mechanical load being applied to the nano-fibers.

10. The fabricated microstructure of claim 7, wherein the entire length of each nano-fiber is curved.

11. A fabricated microstructure, comprising:
a substrate;

a wire disposed on the substrate; and
a plurality of nano-fibers attached to the substrate,
wherein the nano-fibers are differentially coated with a magnetostrictive material to leave a portion of each nano-fiber coated with the magnetostrictive material and another portion of the nano-fiber uncoated,
wherein the nano-fibers are electrically isolated from said wire,

the nano-fibers configured to move between a first state and a second state in response to a magnetic field applied by the wire, wherein each nano-fiber is straight in the first state and curved in the second state, wherein, when the nano-fibers are in the first state and in contact with a contact surface, the nano-fibers do not adhere to the contact surface, and wherein, when the nano-fibers are in the second state and in contact with a contact surface, the nano-fibers adhere to the contact surface.

12. The fabricated microstructure of claim 11, wherein in response to the magnetic field the magnetostrictive material bends the nano-fibers.

13. The fabricated microstructure of claim 11, wherein the nano-fibers move between the first and second states without an external mechanical load being applied to the nano-fibers.

14. The fabricated microstructure of claim 11, wherein the entire length of each nano-fiber is curved.

15. A fabricated microstructure, comprising:
a substrate;

a wire disposed on the substrate; and
a plurality of nano-fibers attached to the substrate,
wherein the nano-fibers are differentially coated with a paramagnetic or ferromagnetic material to leave a portion of each nano-fiber coated with the paramagnetic or ferromagnetic material and another portion of the nano-fiber uncoated,

wherein the nano-fibers are electrically isolated from said wire,
the nano-fibers configured to move between a first state and a second state in response to a magnetic field applied by the wire, wherein each nano-fiber is straight in the first state and curved in the second state, wherein, when the nano-fibers are in the first state and in contact with a contact surface, the nano-fibers do not adhere to the contact surface, and wherein, when the nano-fibers are in the second state and in contact with a contact surface, the nano-fibers adhere to the contact surface.

16. The fabricated microstructure of claim 15, wherein in response to the magnetic field the paramagnetic or ferromagnetic material bends the nano-fibers.

17. The fabricated microstructure of claim 15, wherein the nano-fibers move between the first and second states without an external mechanical load being applied to the nano-fibers.

* * * * *